

OPERATOR'S MANUAL



(Note: In this manual, the Cabinetizer™ may be shown with the optional Drill Drive™ winch assembly)

A WARNING A

Read and become familiar with this manual BEFORE operating unit.

Before operating this equipment, thoroughly read this set of instructions, make sure you understand them, and only then follow the step-by-step directions. Failure to do so could result in serious property damage and / or serious bodily injury.

This manual covers CABINETIZERTM Cabinet Lift Model 76.

NOTICE: All contents of this manual are copyrighted and nothing may be reprinted in whole or in part without prior written permission.

Warning / Instructional Information	Page 1
User Components	Page 2
Care & Maintenance	Page 3
Assembly	Page 4
Operation	Page 6



www.telproinc.com

All photos are for illustrative purposes only. Always wear proper Personal Protective Equipment.

To our valued customer:

Thank you for choosing the Cabinetizer™ Cabinet Lift. We are pleased that we are able to provide equipment to make your work easier.

Our efforts are focused on producing the finest quality equipment of which we are capable. We know that extra time and effort spent on our part to design and produce a high quality finished product will mean time and effort saved on your part when you use it. This is important to us.

Foundational to all of our work at Telpro Inc. is the fact that God is our creator. It is our desire to honor him in our work and business relationships. We are able to provide equipment to ease only your physical labor. But Jesus said, "Come to me, all you who are weary and burdened, and I will give you rest. Take my yoke upon you and learn from me, for I am gentle and humble in heart, and you will find rest for your souls. For my yoke is easy and my burden light."

Jesus also said, "I have come that they might have life, and have it to the full." The Apostle Peter said, "Salvation is to be found through him alone; in all the world there is no one else whom God has given who can save us...Leave all your worries with him because he cares for you."

Thank you again for giving us the opportunity to work with you. Any questions or comments that you may have regarding our equipment or company are always welcome.

Telpro Inc.

⚠ WARNING ⚠

Read and follow these warnings and the instructions that follow. Failure to do so could result in serious property damage and/or serious bodily injury.

- BEFORE operating this equipment, thoroughly read this set of instructions, make sure you understand them, and only then follow the step-by-step directions.

 FAILURE TO READ AND FOLLOW THESE INSTRUCTIONS could result in failure of the equipment. Failure of the equipment while the lift is raised can include a sudden and rapid lowering of the lift and load possibly resulting in serious property damage and/or serious bodily injury.
- Use and maintenance of the Cabinetizer™ Cabinet Lift shall be limited to authorized personnel who are trained in the proper techniques for its safe operation and maintenance and who are familiar with the various hazards of overhead material handling.
- It shall be the responsibility of any and all users of the Cabinetizer $^{\text{™}}$ Cabinet Lift to become familiar and comply with all:
 - -aspects of assembly, operation and necessary safety precautions.
 - -applicable federal, state, and local statutes or regulations
- The lift capacity of the Cabinetizer™ Cabinet Lift is 300 lbs. (136 kg). DO NOT load the unit beyond this limit. Failure to follow this warning can result in damage to the Cabinetizer™ Cabinet Lift contributing to a sudden failure of the machine and serious property damage and/or serious bodily injury. The lift capacity is 150 lbs. if any of the optional extensions are used.
- DO NOT ATTEMPT TO USE YOUR Cabinetizer™ Cabinet Lift IF ANY PART IS MISSING, DAMAGED OR WORN. ORDER A REPLACEMENT PART IMMEDIATELY. Using a Cabinetizer™ Cabinet Lift with missing, damaged or worn components can result in failure of the unit and possibly severe property damage and/or serious bodily injury.
- INSPECT THE STRAP BEFORE EACH USE. REPLACE AT THE FIRST SIGN OF WEAR. A worn, damaged or improperly installed strap can fail resulting in a sudden and rapid lowering of the lift and the load and possibly resulting in serious property damage and/or serious bodily injury.
- DO NOT ROLL a loaded Cabinetizer™ Cabinet Lift while the load is raised. Always keep the load lowered until the lift is in

place beneath the space in which the cabinets will be installed. Rolling a Cabinetizer™ Cabinet Lift while the load is raised can result in tipping the lift and load possibly resulting in serious property damage and/or serious bodily injury.

- The Cabinetizer™ Cabinet Lift is designed exclusively as a material lift and shall be used for no other purpose. The Cabinetizer™ Cabinet Lift is not a personnel lift or platform and shall not be used as such. DO NOT sit or stand on any part of the Cabinetizer™. Using the Cabinetizer™ Cabinet Lift for purposes other than a material lift can subject the unit to stresses and loads that it was not designed to carry. This can result in failure of the unit which may include a sudden and rapid lowering of the lift and the load possibly resulting in serious property damage and/or serious bodily injury.
- · Keep body parts out from under load at all times.
- Use the Cabinetizer[™] Cabinet Lift only on smooth level surfaces.
- The Cabinetizer™ Cabinet Lift is made of steel which conducts electricity. KEEP THE UNIT AWAY FROM LIVE ELECTRICAL WIRES. Failure to do so could result in electrocution.
- Use only factory authorized replacement parts. Installation of other parts can compromise the safe design of the Cabinetizer™ Cabinet Lift and may cause failure of the unit possibly resulting in serious property damage and/or serious bodily injury.
- Do not transport an assembled Cabinetizer™ Cabinet Lift.
- Be Observant Of Any Potentially Hazardous Conditions, such as, but not limited to:

-Any obstructions -Holes

-Loose materials -Electrical installations


-Moving machinery -Stairwells


-Open ducts -Changes in floor elevations

-Wires -Etc.

- Before loading Cabinetizer[™] Cabinet Lift, BE SURE THE MAIN UPRIGHT BOOM IS firmly secured to the Base and that the Split Boom connector screws are tightened firmly.
- •Always balance the load on the Cabinetizer™ Cabinet Lift. Failure to do so can result in tipping the lift and load possibly resulting in serious property damage and/or serious bodily injury.

Questions? - Call Telpro Inc. Customer Service at 1-800-448-0822 or 1-800-441-0551

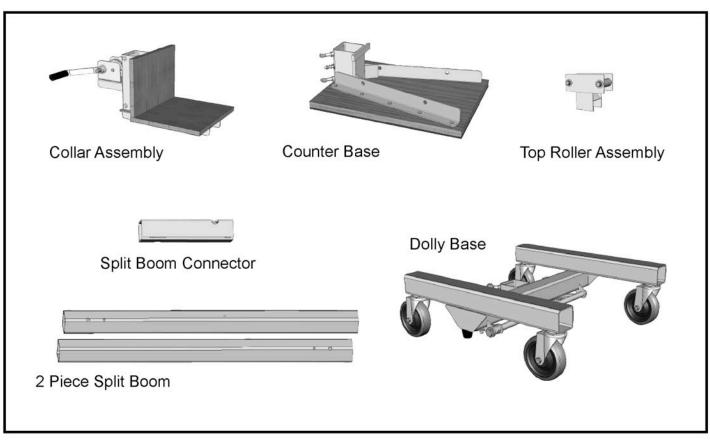

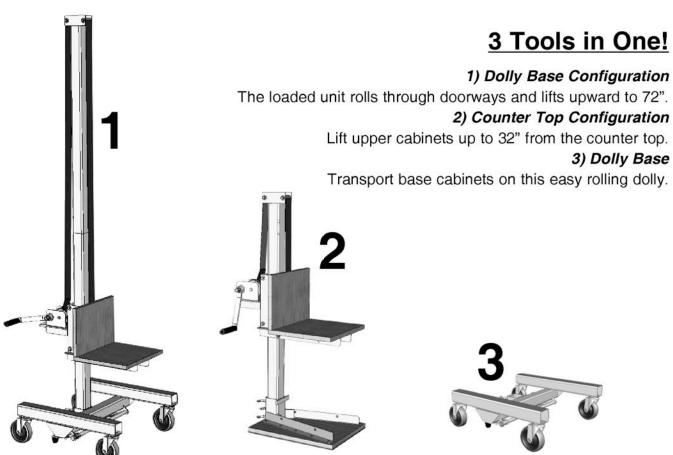





Store the Cabinetizer™ Cabinet Lifter in a dry place.




- Take reasonable care to avoid damaging the Cabinetizer™ Cabinet Lifter when transporting it. Do not transport the Cabinetizer™ while it is assembled.
- Do not hammer on any members or components of the Cabinetizer™ Cabinet Lifter.
- Avoid damage to edges, surfaces, and ends of the Boom Tubes. Do not drop them on floors or hard surfaces. Smooth, straight edges will allow the Collar of the Cabinetizer[™] to travel freely up and down the boom.

ASSEMBLY - DOLLY BASE CONFIGURATION



1. Install either of the boom sections into the dolly base. Make sure the holes in the corner of the tube are up.

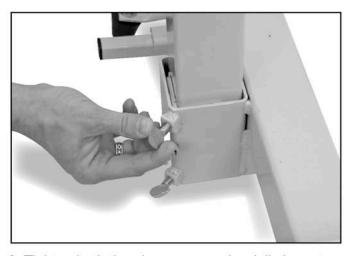


2. Tighten both thumb screws on the dolly base to hold the boom tube securely.




3. Let out about a 2' loop of strap on the Collar Assembly and slide the Collar Assembly over the boom tube.


MAKE SURE the seat of the Collar Assembly is oriented on the same side as the longer base legs as shown.

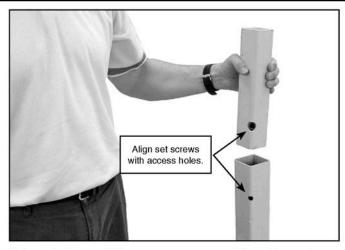


4. Insert the split boom connector. Align the set screws with the access holes in the boom tube.

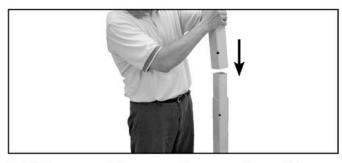

5. Fit the second boom section over the split boom connector. Align the corner access holes with those of the lower section.

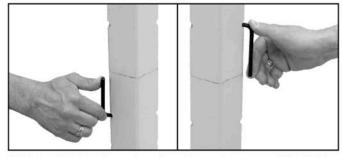

6. Using the hex key stored on the collar assembly, tighten both set screws on the split boom connector securely.

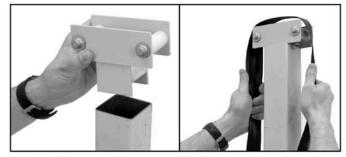


7. Insert the top roller assembly then position the strap over the top rollers, raising the Collar up the Boom.

ASSEMBLY - COUNTER BASE CONFIGURATION



1. Install either of the boom sections into the counter base.

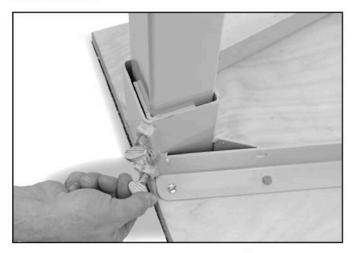


2. Tighten the thumb screws on the Counter Base to hold the Boom firmly in place.



3. Let out a 2' loop of strap on the Collar Assembly and slide the Collar Assembly over the boom tube.

MAKE SURE the seat of the Collar Assembly is oriented on the same side as the Counter Base Support as shown.

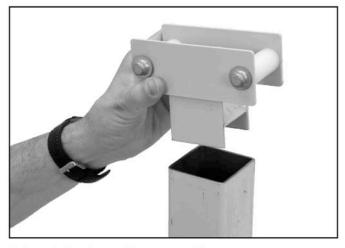


4. Insert the top roller assembly.




5. Finally, position the strap over the top rollers - raising the Collar up the Boom.



Your Cabinetizer™ is now ready for use.

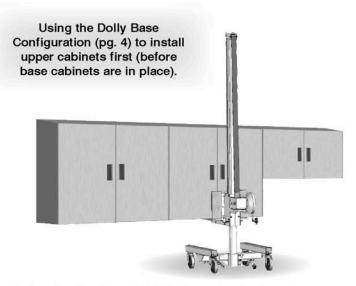

 Load cabinets onto lift. Balance the load on the Cabinetizer[™] to avoid tipping.

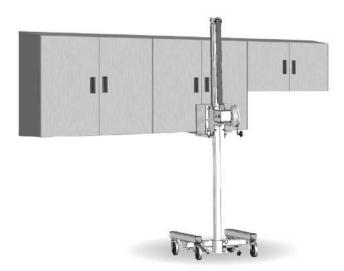


- 2. -Operate the winch to raise cabinets into place.
 - -Lock brake on Dolly Base.
 - -Level cabinets and fasten in place.



The Dolly Base can be used independently to transport cabinets around the work site.

Using the Counter Base Configuration (pg. 5) to install upper cabinets second (when base cabinets are in place).

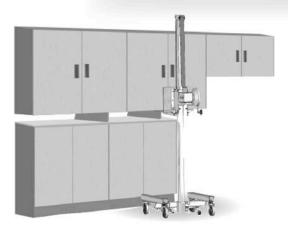

1. Start by using the Dolly Base Assembly to raise the upper cabinets to blocks (approx. 9" high, blocks not included) on the base counters.



- Use the Counter Base Configuration (pg. 5) for final positioning of the cabinets.
 - Balance the load on the Cabinetizer[™] Cabinet Lift to avoid tipping.
- Operate the winch to raise cabinets into place.
- Level cabinets and fasten in place.




www.telproinc.com




SEAT / BASE EXTENSION 1424

Extend the load depth to 24" for deeper cabinets and other materials. Lift capacity with installed extension is 150 lbs.

Easy to assemble / disassemble.







www.telproinc.com



Call us: **Telpro inc.**

1(800)441.0551 1(800)448.0822

We'll get you set up!