

The cost effective alternative to expensive motorized units and inefficient scaffolding.

Tele-Tower[®]

Adjustable Work Platform

Models

1101 / 1101-96

1101-22 / 1101-2296



Meets Applicable U.S. ANSI and OSHA Standards*
For Rolling Work Platforms

- Safe
- Portable
- All Steel Construction
- Integrated Safety Components
- Five Minute Assembly - No Tools Needed



Shown here with extension

*Multiple Models geared for OSHA 1926.450 Construction & OSHA 1910.29 General Industry

Made in the U.S.A.



Manufactured by:

Telpro Inc.[®]

7251 So. 42nd St.
Grand Forks, ND 58201
(701) 775-0551
(800) 448-0822

telpromktg@telproinc.com

www.telproinc.com

Innovation



Uniquely Adjustable Platform

Unique telescoping frame combines with a proprietary brake winch and cable system to rapidly adjust the platform height from 2' to 11' at six inch intervals (up to 18' working height*).

For higher elevations, an optional extension is available. With the extension installed, the unit will reach platform heights from 12.5' - 17.5' (up to 24' working height*).

Base unit assembles is just 5-10 minutes by one worker with no tools. (Same holds true for the extension.)

**Working height is approximated by adding platform height to average worker's reach.*

Safety & Quality

Stable 6' Base



- Manual Winch System
- Positive Platform Heights
- Integral Outriggers
- Safety chains
- 4" Toe Safety Rail
- Heavy-Duty Casters
- Secure Locking Pins

5" Dual locking casters



Spring loaded positive lock pins



Integral Adjustable Outriggers



Integral Toe Boards; Guard Rails w/ Safety Chains Included

Versatility



Assembly

The Tele-Tower® prevents wasted time setting up, adjusting, and tearing down other scaffolding. No more worries about losing parts, Tele-Tower® components are integral to the unit. One person can assemble the unit safely from the ground - no tools needed. Transport in a van or pickup truck.

Working Space

The spacious deck allows two workers to work side by side or allows one person a generous work space. Safe and affordable, two reasons to replace your motorized units to this cost effective solution.

*Steel Deck: 19" or 22" W x 68" or 92" L
(depending on model choice)
4" toe board integrated into the deck*



Outriggers

Versatile outriggers have easy slide-out, lock-in adjustment. The 6' base provides stability at higher elevations. Slide one side in when working next to a permanent wall - slide both sides in when passing through standard 32" doorways.



72" Full Extension



50" Half Extension



31.5" Retracted

Specifications & Features


Tele-Tower®

Tele-Tower® Model	Net Weight	Static Load Rating	Steel Safety Deck	Platform Heights	Max. Working Height	Nominal Deck Size	Elevating System	6' Base: Height to Base Ratio	Ship Box Qty 1 Dimensions	Optional Extension	Geared toward OSHA:
1101	~370 LBS.	550 LBS.	w/ 4" Toeboard	2' - 11'	approx. 18'	19" Wide 6' Long	Manual Winch & Cable System	Better than 2:1	84"x34"x24" 450 LBS.	1177: Adds 6.5' to deck height	1926.450 Construction
1101-96	~420 LBS.	550 LBS.	w/ 4" Toeboard	2' - 11'	approx. 18'	19" Wide 8' Long	Manual Winch & Cable System	Better than 2:1	106"x36"x24" 500 LBS.	1177-96: Adds 6.5' to deck height	1926.450 Construction
1101-22	~470 LBS.	800 LBS.	w/ 4" Toeboard	2' - 11'	approx. 18'	22" Wide 6' Long	Manual Winch & Cable System	Better than 2:1	84" x 36" x 24" 550 LBS.	1177-22: Adds 6.5' to deck height	1910.29 General Industry
1101-2296	~520 LBS.	800 LBS.	w/ 4" Toeboard	2' - 11'	approx. 18'	22" Wide 8' Long	Manual Winch & Cable System	Better than 2:1	106"x36"x24" 600 LBS.	1177-2296: Adds 6.5' to deck height	1910.29 General Industry


Tele-Tower® Extensions 1177, 1177-96, 1177-22, 1177-2296

Extension Model	Net Weight	Static Load Rating	Steel Safety Deck	Platform Heights	Max. Working Height	Safety Lock Pins	Elevating System	6' Base: Height to Base Ratio	Ship Box Qty 1 Dimensions	Install Time
1177 & 1177-96	100 / 140 LBS.	550 LBS.	w/ 4" Toe board	12.5' - 17.5'	approx. 24'	in 6" increments from 12.5'-17.5'	Manual Winch & Cable System	Better than 3:1	84" x 34" x 17" 180-220 LBS.	Approximately 10 minutes!
1177-22 & 1177-2296	150 / 190 LBS.	800 LBS.	w/ 4" Toe board	12.5' - 17.5'	approx. 24'	in 6" increments from 12.5'-17.5'	Manual Winch & Cable System	Better than 3:1	84" x 34" x 17" 190 -230 LBS.	Approximately 10 minutes!

Tele-Tower® Base Unit

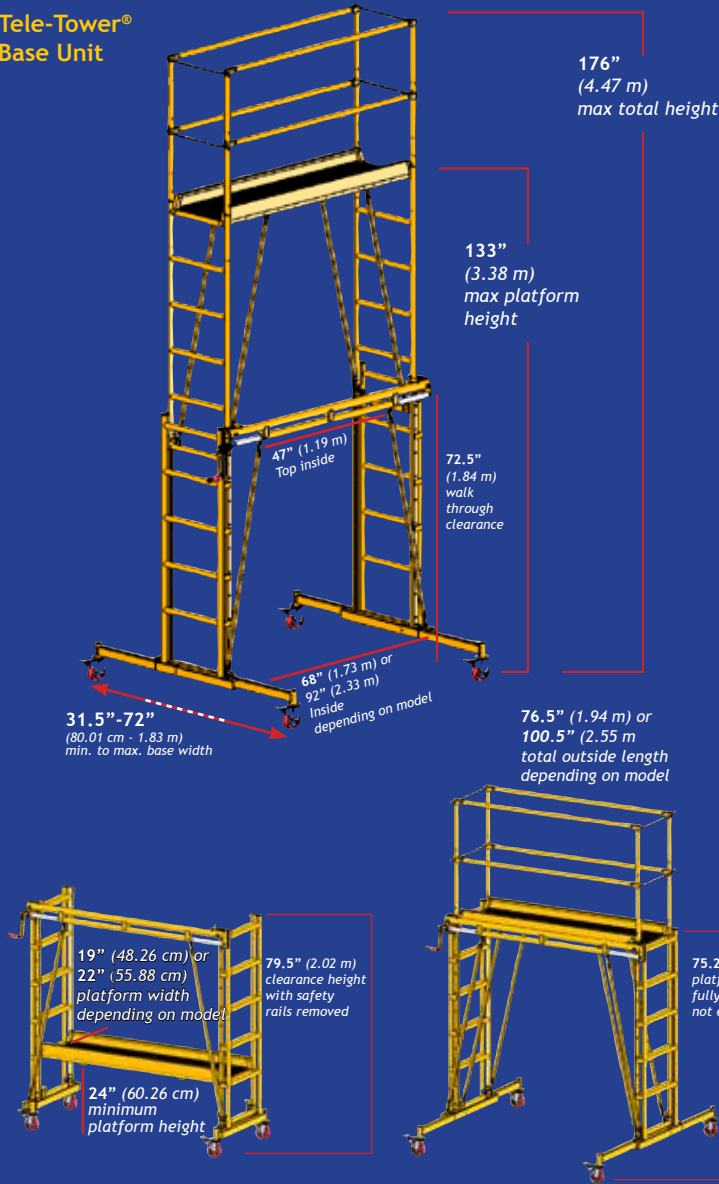

Tele-Tower® with Extension

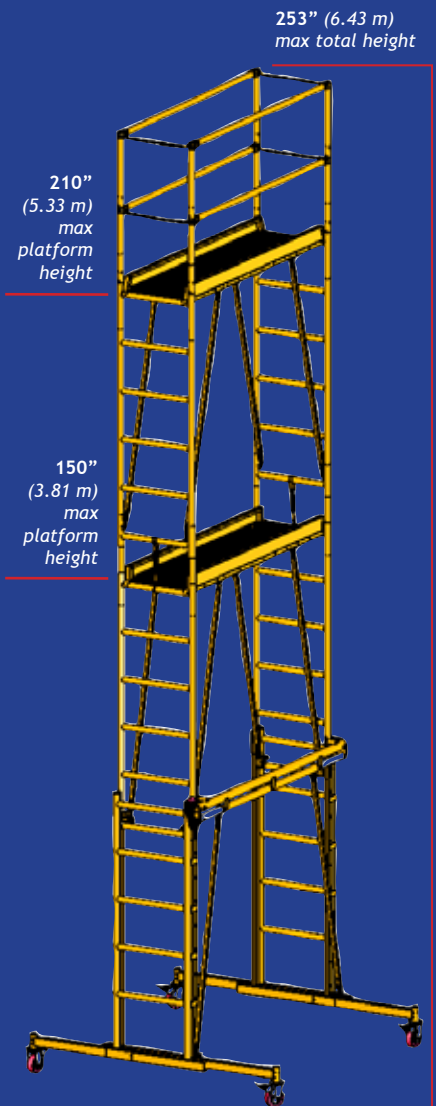

Tele-Tower® consists of:

- (2) Telescoping end sections with outriggers on 5" heavy duty dual locking scaffold casters
- (1) Connecting beam with cable elevating mechanism
- (6) Interchangeable sway braces
- (1) Steel safety deck with 4" toe board
- (1) Set of 4 safety rails with 4 safety chains



Extension consists of:

- (2) Complete Extension Ladders
- (4) Extension Coupler Pipes
- (4) Braces
- (1) Deck





Safety Hoist

Use the Dual Drive winch (Manual or Drill Drive) to safely and rapidly lift up to 75 lbs to the deck. Features patented safety **overload protecting** auto-brake winch system. Unit includes bucket harness. (bucket not included)

Accessorize Your Tele-Tower® Adjustable Work Platform



Large Tray

Use one or both of the tool trays to keep tools at hand and off the deck.

Small Tray



Reduction Drive Is an add-on to the Tele-Tower® that makes it easier to raise and lower the Tele-Tower®. Great for when you have an extension unit installed.




Ground Drive

- Stay productively on the deck & move the Tele-Tower® around the job with this attachment.
- Automatically adjusts with the Tele-Tower® for deck heights from 6' to 11'
- Fits Tele-Tower® Models:
 - 1101
 - 1101-96
 - 1101-22
 - 1101-2296

(not for use with installed extension unit)

Extensions

Height extensions for both the Tele-Tower® model 1101 & 1101-96. Fasten to the top of the Tele-Tower® and add 6.5 feet to the height. With the extension on the Tele-Tower® is adjustable from 12.5 feet to 17.5 feet in 6 inch increments.



Safety Rail Storage Cradle

Holds all four safety rails securely under your deck. Keeps the rails close at hand when not in use.

The Storage Kit is excellent for keeping your Tele-Tower® in a nice compact space. It keeps the unit all together in a smaller foot print. It will also hold the extension.






Tele-Tower® Connector

Joins multiple Tele-Tower®s together at the base and the deck, allowing you to create a long working platform. Caution must be used when adjusting heights of the multiple Tele-Tower®s joined by the Connector. Each Tele-Tower® must be adjusted individually and the deck connector will need to be repositioned after adjusting. All Tele-Tower®s need to be adjusted to the same height when using the Connector. End Chains must be used to connect the two guardrails on either end. Add the 14-07 Tele-Rail to add guard rails between two Tele-Tower® units spanning a bus or vehicle.



Safety Pole

Use to secure the end chains when working against a wall and not using the guardrails on the wall side. These are sold individually and two are required on a Tele-Tower®.

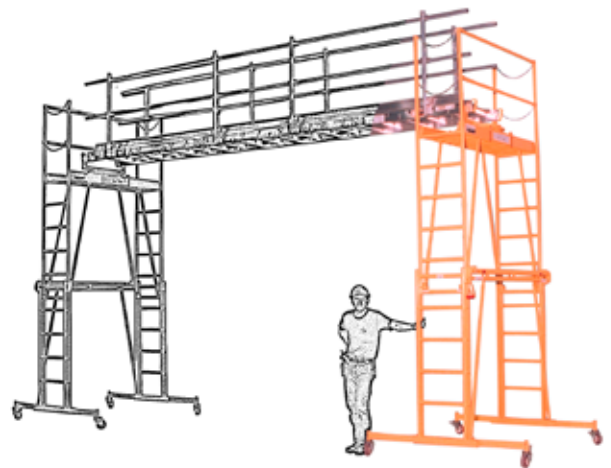

Got a custom application or need?

Give us a call or email us with all of the details and let us see what we can do for you.

1-800-448-0822

telpromktg@telproinc.com

**Look Over Our Complete Line Up of
Ergonomics & Safety Solutions for
Construction & Industry at
www.telproinc.com**

World's Best Drywall Lifts
PANEL LIFT USA
Genuine Brand

Tele-Tower
Adjustable Work Platform

DOORMINATOR USA
Door Handlers



The Troll
MATERIAL HANDLING CARTS

World's Best Cabinet Lifts™
CABINETIZER™
by Telpro Inc.

DRILLRITE USA
Overhead Concrete Drill Press

Telpro Inc.

7251 S 42nd St • Grand Forks, ND 58201 • 701-775-0551 • 800-448-0822
www.telproinc.com • telpromktg@telproinc.com