# THE DRYWALL LIFTER PANELLE STORY ®

Made in the USA by Telpro Inc.

# MODELS & ACCESSORIES

138-2	154

110

The PANELLIFT® Drywall Lifter is ergonomically designed to save your back. One person can easily transport, assemble, and operate each model of the PANELLIFT®, making drywalling a one person job. No tools are required for assembly. Dismantle the unit and put it into the



trunk of your vehicle for easy transport to your next job site. The tripod base folds to allow the assembled unit to pass through doorways. The PANELLIFT® is made in the USA using all-steel construction to handle commercial work loads.
















# One person is all you need.

#### **Model 138-2**

The original PANELLIFT® Model 138-2 is

the industry's leading drywall lifter.

Why struggle with wallboard when you can single handedly lift wallboard up to 11 foot walls and ceilings. Cradle tilts laterally 65° for easy loading and for installation on walls and sloped ceilings. It also tilts longitudinally 10°. Fast action, single stage winch with silent cam-lock brake easily lifts and lowers wallboard so you don't have to strain your back!

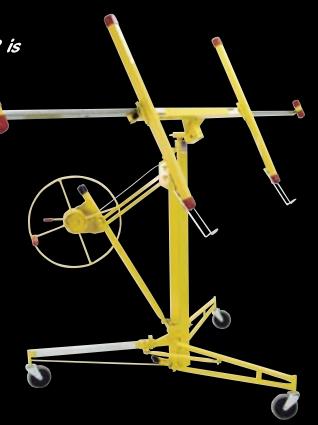

## You asked for it, we did it!

We improved the design of the PANELLIFT® DRYWALL LIFTERS.

The upgrades are reflected in the pictures below. The upgrades reflect our greatest effort to improve our products to meet customer expectations and exceed the industry standards.



Jam resistant Tripod Base simplifies assembly / disassembly.



Heavy duty Frame Base and Center Leg stand up to heavy use.



Easy action Cross Arm release simplifies and speeds disassembly.

#### Always the right choice.




#### **Model 182**

Specifically designed for those extra tall jobs, the PANELLIFT® Model 182 has the same great features as the original Model 138-2 with the added benefit of a higher standard reach.

The maximum standard reach of the Model 182 is 15 feet.

(16'6" with optional Extension 154)



#### Model 460

The fastest lift available, bar none! The PANELLIFT® Model 460 is the undisputed ruler of the trade with a patented DC / Hydraulic chain-driven lift mechanism that sets a whole new standard for productivity, versatility, and ergonomics. With the Model 460, you can lift a sheet of drywall to 15' in about 8 seconds at the flip of a lever. An easy loading height of just 40" makes the Model 460 the smart choice when high-volume, all-day production is required. Two batteries and charger are included.



#### ACCESSORIES

For 138-2 or 182	Transport & Storage Cart Model 110 Keep your Model 138-2 or 182 safe and secure. Transports easily and stores upright in a compact area.
For 138-2	Extension Model 186 Interchange with standard telescoping sections to increase reaching heights to 15 feet for the Model 138-2.
All Models	Extension Model 154  Add on to standard telescoping sections to increase standard reaching heights an additional 18 inches.
All Models	Loader Model 195 Alleviate back strain by turning your PANELLIFT® into a complete floor-to-ceiling drywall installation system.

The optional PANELLIFT® accessories are inexpensupgrades the increase the lift and make installations and efficient



at will utility of your drywall easy

Extensions

154

186

## FEATURES & OPTIONS

	Model 138-2	Model 182	Model 460
Sheet size & capacity	1@ 4'x16'	1@ 4'x16'	1@ 4'x16'
MAX Standard Reach	11 FEET	15 FEET	15 FEET
Reach with Extension 154	12'5"	16'6"	16'6"
Reach with Extension 186	15 FEET	-	-
Standard Loading Height	37 INCHES	52 INCHES	40 INCHES
Loading Height w/ Loader 195	2 - 4 INCHES	20 INCHES	4 - 6 INCHES
Net Weight	100 lbs	110 lbs	180 lbs
110 Cart	Yes	Yes	NO
Power Source	Manual	Manual	DC / Hydraulic
Lift Mechanism	Single-stage Cable	Single-stage Cable	Multi-stage Chain

<sup>\*</sup> THE LOADER 195 DOES NOT WORK WITH THE EXTENSIONS.

TOLL FREE: 1.800.448.0822 FAX: 1.800.474.9993



E-MAIL: telpromktg@telproinc.com www.telproinc.com

<sup>\* \*</sup> THE MODEL 138-2 WITH 186 FRAME ASSEMBLY WILL NOT WORK ON 8 FOOT CEILINGS.