



Engineering & Manufacturing

2000 lb capacity

Standard oversize roller bearing phenolic 8"x 3" load wheels and 6"x 2" steering casters provide ease of movement


Each machine is factory proof tested to 150% of load

Safety Swivel Hook is attached directly to boom

Safety by-pass relief valve is standard to prevent dangerous overloading

B-2000CW

Counterweighted Crane

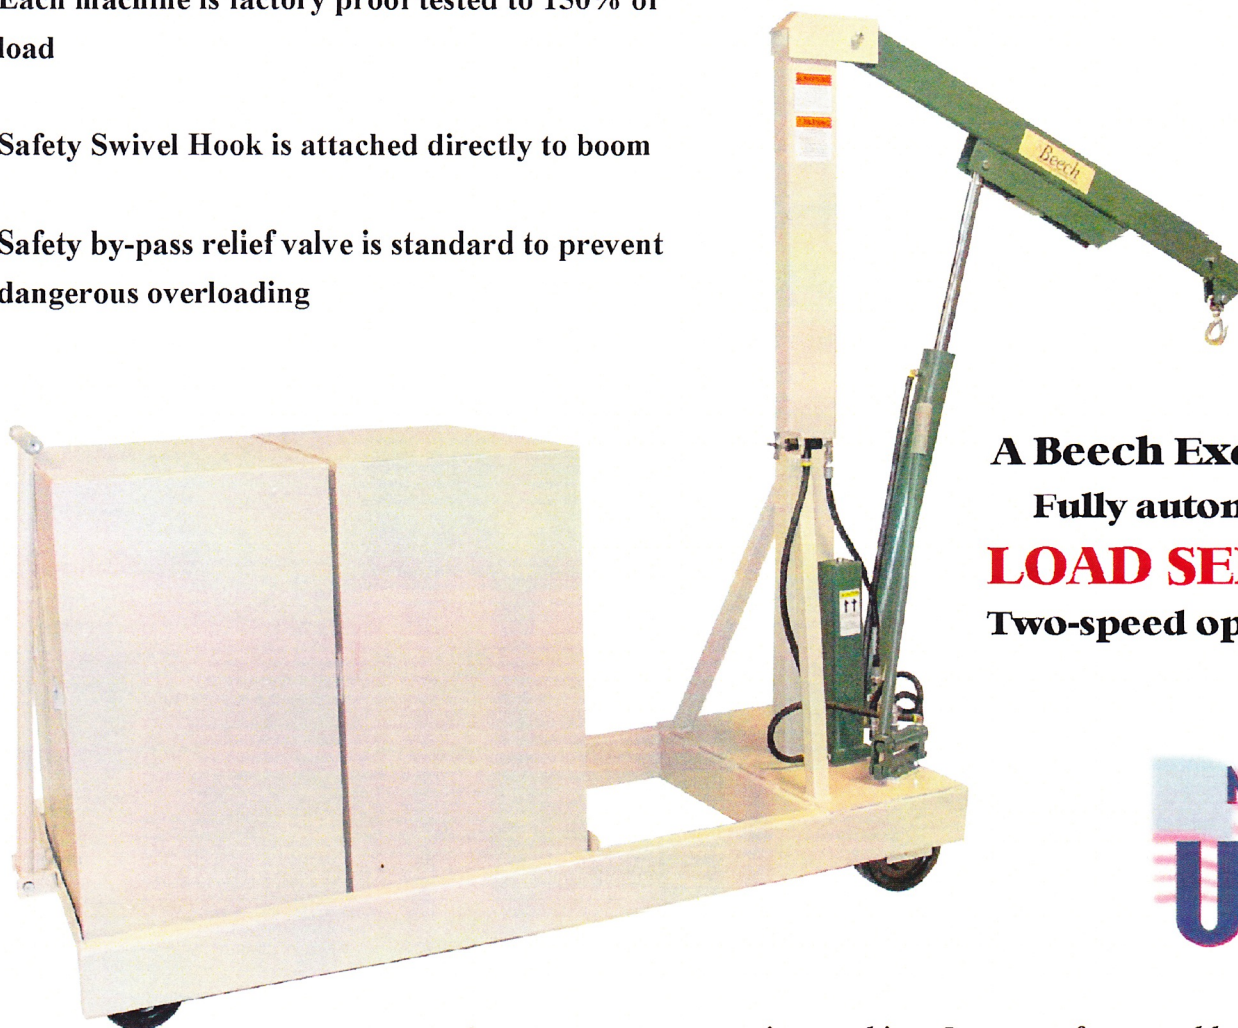

A Beech Exclusive
Fully automatic
LOAD SENSING
Two-speed operation

Made
in the
USA

2 year warranty on entire machine, 5 year on frame weldment


P.O. Box 947 • New Philadelphia, Ohio 44663 • Phone 1-800-726-9491 • Fax 330-343-3037

www.beechengineering.com

A Division of



Model B-2000CW Hydraulic Floor Crane

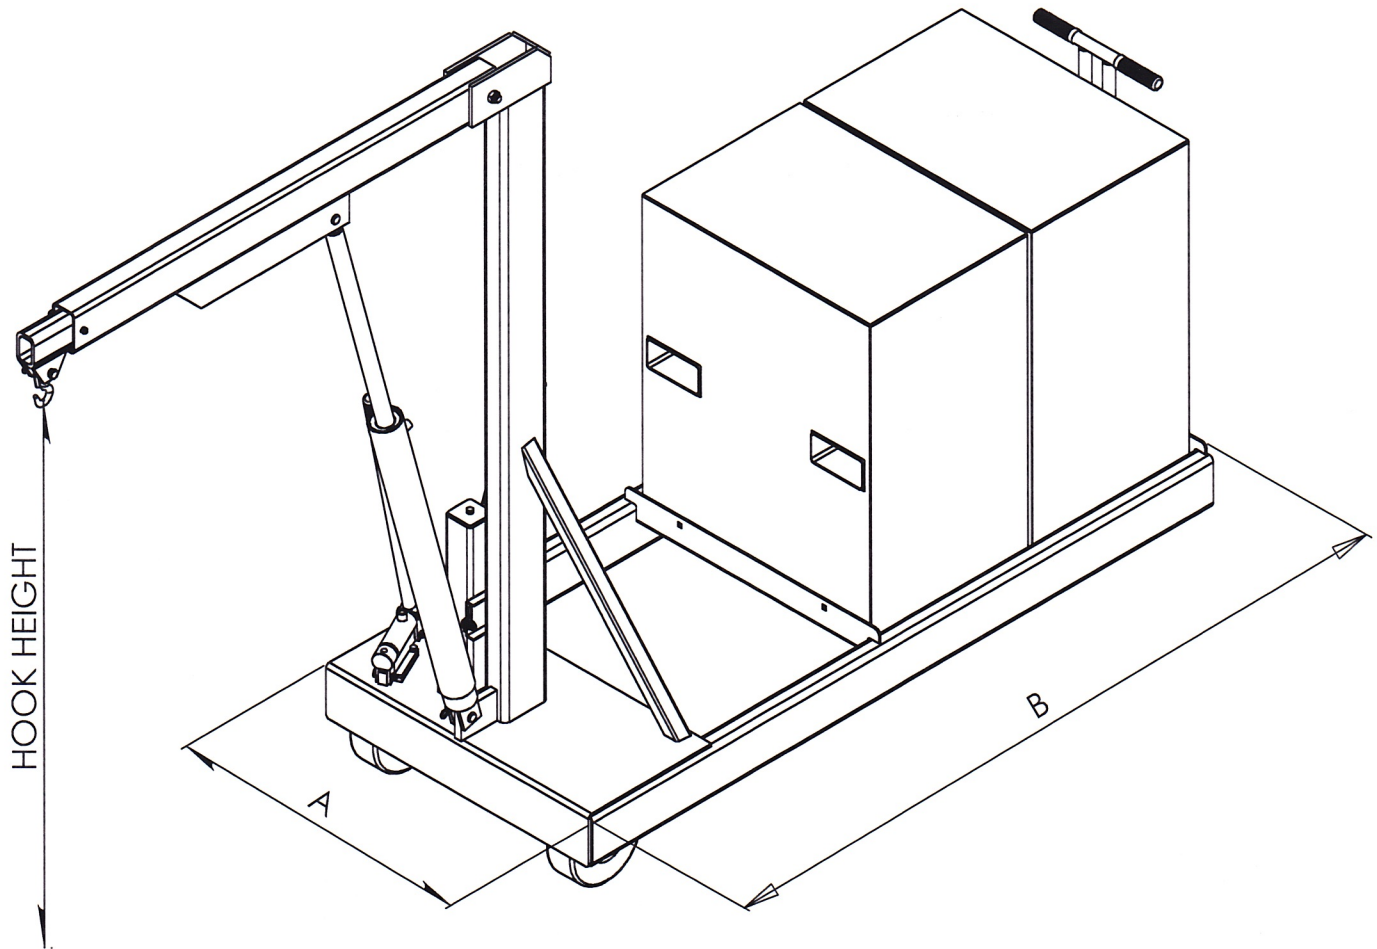

Model No.	Pump Type ¹	Machine Weight	Boom Position ²	Hook Capacity	Hook Height ³		Dimensions		
					Min	Max	A	B	OAH
B-2000CW	Two Speed Manual	3070 lbs.	47 1/2"	2000 lbs.	34"	107"	30 1/2"	72"	75 1/4"
			55 3/4"	1600 lbs.	28"	114"			
			66"	1400 lbs.	21"	122"			
			76 1/4"	1200 lbs.	14"	130"			
			86 1/2"	1000 lbs.	8"	138"			

¹ Measured from the front of base channel to centerline of load hook.

² Add 7" to maximum hook height to assure overhead clearance.

Beech Engineering & Manufacturing
P. O. Box 947 * New Philadelphia, Ohio 44663 * Phone 800-726-9491 * Fax 330-343-3037
www.beechengineering.com