

BIL-JAX[®]

PRO-JAX[®] UTILITY SCAFFOLD



BIL-JAX[®]

A STEP ABOVE[®]

125 Taylor Parkway
Archbold, OH 43502-9309
Phone 419-445-8915, 800-537-0540
Fax 419-445-0367, www.biljax.com

ISO 9001-2000 Certified

CHECK THE ADVANTAGES:

- 29" wide steel frames in 6', 8' and 10' brace lengths.
- Easily set up by one person.
- All steel square-tubed construction, yet light in weight.
- Packages come with our quality 250 lb. capacity 5" caster with both wheel and swivel locks. A heavy duty 8" caster is available.
- Patented knurled rungs for additional gripping.
- Unit easily rolls through doorways.
- Steel frame around plywood deck and 2 steel supports underneath.
- Heavy duty spring activated locking mechanism with no loose parts.
- Highest load capacity in its class at 1000 lbs.



0127-006-0 shown in use over lower obstacles allowed by the span type platform arm braces.

New, patent pending Saf-T-Lok®



Unique design allows guard railing to stay at platform level at all times. Platform level adjusts in 2" increments.



Unique Saf-T-Lok® provides added safety and is more efficient for use.



Pro-Jax units (with casters removed) can be used on stairs.

TYPICAL APPLICATIONS:

Electrical
Painting
Acoustical
Finishing
Window Cleaning
HVAC Installation


Sign Installation and Maintenance
Overhead Door Installation
Lighting and Wiring Maintenance
General Building Maintenance
Window Treatment Installation



0127-006-1 shown in a maintenance application.

UNIT HEIGHTS:

NOTE: Bil-Jax recommends and some states limit the free-standing tower height to be 3 times the minimum base dimension. When platform height exceeds 4', guard railing is recommended but not required. Current OSHA codes allow 4 times the minimum base dimension. Consult your state and local codes for compliance information.

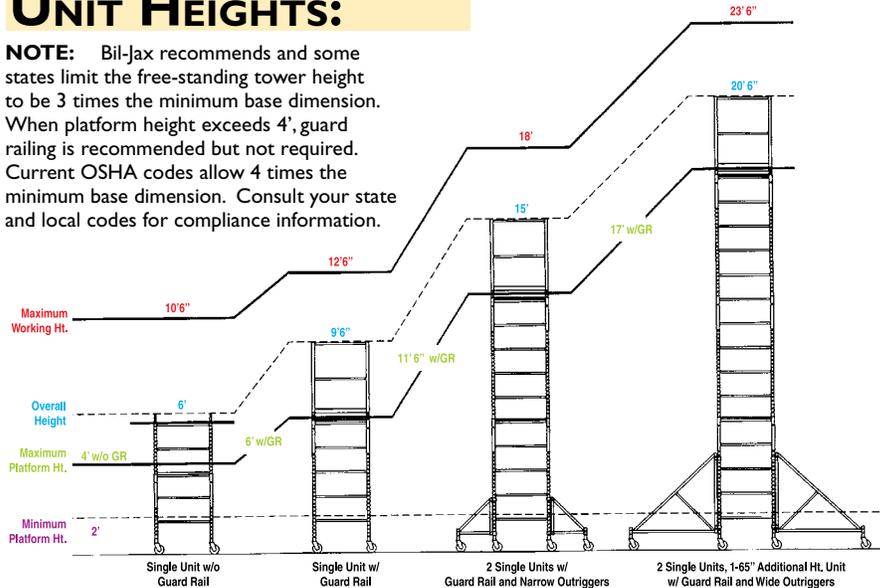

Units can be stacked for additional working height.

Due to continuous product improvements, we reserve the right to make specification and/or equipment modifications without prior notification or obligation. All photographs and drawings in this brochure are for illustrative purposes only. Refer to applicable ANSI and OSHA Codes and Regulations for the proper use of this equipment and do not use in areas where user and/or equipment can come in contact with live power. Failure to follow the appropriate safety instructions and procedures, or to otherwise act irresponsibly, may result in serious injury or death.

PRO-JAX® UTILITY SCAFFOLD PACKAGES:

| PRO-JAX UTILITY SCAFFOLD STEEL PACKAGES (Includes frames, braces, platform & casters; outriggers and guard rails included where applicable.) | | | | | | | |
|---|--------|--------------------|------------|------------|--------|---------|-----|
| Part No. | Length | Platform Ht. Range | Max.Wk.Ht. | OverallHt. | GdRail | Outrig. | Wt. |
| 0127-006-0 | 6' | 2'-4' | 10'6" | 6' | NO | NO | 147 |
| 0127-006-1 | 6' | 2'-6' | 12'6" | 9'6" | YES | NO | 240 |
| 0127-006-2 | 6' | 2'-11.5' | 18' | 15' | YES | YES | 430 |
| 0127-006-3 | 6' | 2'-17' | 23'6" | 20'6" | YES | YES | 538 |
| 0127-008-0 | 8' | 2'-4' | 10'6" | 6' | NO | NO | 173 |
| 0127-008-1 | 8' | 2'-6' | 12'6" | 9'6" | YES | NO | 279 |
| 0127-008-2 | 8' | 2'-11.5' | 18' | 15' | YES | YES | 490 |
| 0127-008-3 | 8' | 2'-17' | 23'6" | 20'6" | YES | YES | 609 |
| 0127-010-0 | 10' | 2'-4' | 10'6" | 6' | NO | NO | 200 |
| 0127-010-1 | 10' | 2'-6' | 12'6" | 9'6" | YES | NO | 316 |
| 0127-010-2 | 10' | 2'-11.5' | 18' | 15' | YES | YES | 525 |
| 0127-010-3 | 10' | 2'-17' | 23'6" | 20'6" | YES | YES | 645 |

NOTE: Guard railing is required by OSHA on all platforms 10' or higher.



0127-006-0 Single Unit

0127-006-1 Single Unit w/Guard Rail

| PRO-JAX UTILITY SCAFFOLD PACKAGE COMPONENTS | | | | | | | |
|---|------------------|------------|------------|------------|------------|------------|------------|
| PKG. PART NO. | | | | | | | |
| 8' and 10' Long Packages Use Same Components Except For Length. | | 0127-006-0 | 0127-006-1 | 0127-006-2 | 0127-006-3 | 0127-007-3 | 0127-007-5 |
| COMPONENTS | | | | | | | |
| 0127-102 | 39" Frame | | | | | 2 | |
| 0127-101 | 65" Frame | 2 | 2 | 4 | 6 | | 2 |
| 0127-163-06 | 6' Arm Brace | 2 | 2 | 4 | 6 | 2 | 2 |
| 0127-108-06 | 6' Deck | 1 | 1 | 2 | 2 | | |
| 0026-835 | 5" Caster w/2 SP | 4 | 4 | 8 | 8 | | |
| 0127-106-06 | 6' Guard Rail | | 2 | 2 | 2 | | |
| 0127-105-18 | 18" W Outrigger | | | 4 | | | |
| 0127-105-24 | 24" W Outrigger | | | | 4 | | |
| 0068-061 | 2" Snap Pin | | | 4 | 8 | 4 | 4 |
| 0068-012 | 2" Hinge Pin | | 4 | 4 | 4 | | |



0127-006-2 2 Single Units w/ Guard Rail & 18" Wide Outriggers



0127-006-3 2 Single Units, 1-65" Additional Height Unit w/Guard Rail & 24" Wide Outriggers

| GUARD RAIL & OUTRIGGER PACKAGES | | |
|---------------------------------|---------------------------------------|---------|
| Part No. | Description | Set Wt. |
| 0127-149-06 | 6' Complete Guard Rail Pkg. (2 pcs.) | 81.5 |
| 0127-149-08 | 8' Complete Guard Rail Pkg. (2 pcs.) | 98 |
| 0127-149-10 | 10' Complete Guard Rail Pkg. (2 pcs.) | 115 |
| 0127-150-18 | 18" Wide Outrigger Package (4 pcs.) | 39 |
| 0127-151-24 | 24" Wide Outrigger Package (4 pcs.) | 50 |

| ADDITIONAL HEIGHT PACKAGES | | | | | |
|----------------------------|--------|--------|-------------|---|--|
| Part No. | Length | Height | Overall Wt. | | |
| 0127-007-3 | 6' | 39" | 75 | When using these packages, remember the need of outriggers and guard railing. | |
| 0127-007-5 | 6' | 65" | 95 | | |
| 0127-009-3 | 8' | 39" | 83 | | |
| 0127-009-5 | 8' | 65" | 103 | | |
| 0127-011-3 | 10' | 39" | 97 | | |
| 0127-011-5 | 10' | 65" | 123 | | |

8' and 10' length units available.
Hinged platforms for inside access are available.
Packages are available with expanded steel walkboards.

COMPONENTS: See price list for complete component listing or consult factory.



0127-163-06 Platform Arm Brace, featuring the new Saf-T-Lok®



0127-108-06 Plywood Deck w/ Steel Frame



0127-113 Expanded Steel Deck



0127-007-3 39" Additional Height Unit



0127-007-5 65" Additional Height Unit



0127-102 39"H Frame



0127-101 65"H Frame



0026-952 Caster



0026-835 Caster



0127-150-18 18" W Outrigger Pkg.



0127-151-24 24" W Outrigger Pkg.



0127-149-06 6' Guard Rail Pkg.

DRYWALL CARTS / DRYWALL LIFTS / HANDY ROLLS:

DRYWALL CARTS

The Drywall Cart is designed to haul full capacity loads with easy maneuverability and complete stability. Support bracing is removable for easy storage and handling.



Drywall Cart
DC 3000 LD

Drywall Cart
DC 3000 MD

Drywall Cart
DC 3000 EX

DRYWALL LIFTS

The Drywall Lift holds 4' x 12' sheets of drywall, and knock down for easy storage and handling. The winch designs use a steering wheel for easy adjustment.



Panel-Jax Drywall Lift
Model DL 100, 5'-10'

Panel-Jax Drywall Lift
Model DL 125, 5'-12'

Panel-Jax Drywall Lift
Model DL 150, 5'-15'

| DRYWALL CARTS | | | |
|----------------|--|-------|------|
| Part No. | Description | Cap.# | Wt.# |
| 0063-0573-01YE | Model DC 3000 LD, Drywall Cart (23" W x 49"L x 45"H) w/ 2 plastic swivel and 2 plastic rigid casters* | 3000 | 83 |
| 0063-0574-11YE | Model DC 3000 MD, Drywall Cart (23"W x 49"L x 45"H) w/ 2 steel swivel and 2 steel rigid casters* | 3000 | 104 |
| 0063-0575-11YE | Model DC 3000 EX, Drywall Cart (28"W x 50"L x 47"H) w/ 2 steel swivel and 2 steel rigid casters* | 3000 | 137 |

*Other caster options available, contact factory for more information.

| DRYWALL LIFTS | | | |
|---------------|--|-------|------|
| Part No. | Description | Cap.# | Wt.# |
| 0063-0547 | Model DL 100, Panel-Jax Drywall Lift Steel, up to 10' Lift Adjustment | 200 | 104 |
| 0063-0580 | Model DL 125, Panel-Jax Drywall Lift Steel, up to 12' Lift Adjustment | 200 | 125 |
| 0063-0595 | Model DL 150, Panel-Jax Drywall Lift Steel, up to 15' Lift Adjustment | 160 | 141 |

NOTE: Model DL 100 includes one replacement cable with the lift. Models DL 125 and DL 150 include two cables (due to the specific lift construction). Cables should be replaced annually or more often if fraying occurs.

HANDY ROLL SCAFFOLDING:

3 Convenient Sizes: 3', 4', and 5' High • All Units Rated With 400# Load Cap. • 2 Caster or 4 Caster Units Available



- Handy Roll Scaffolding features a sturdy, 1" O.D. tubular steel construction.
- It is a fabricated, easy to use unit that folds for convenient storage and handling.
- Four inch swivel casters with brakes provide complete portability.
- Steel planks are 10" wide.

Handy Roll, 0063-0435-44, 4-caster model shown, 2 caster/end options listed below



| HANDY ROLL SCAFFOLDING - 4 CASTER UNITS | | | |
|---|--|------|-----|
| Part No. | Description | Cap. | Wt. |
| 0063-0435-34 | 3' Handy Roll Scaff. 4 Caster Unit w/ Steel Platforms, 24" W x 48" L x 39" H | 400 | 72 |
| 0063-0435-44 | 4' Handy Roll Scaff. 4 Caster Unit w/ Steel Platforms, 24" W x 48" L x 51" H | 400 | 87 |
| 0063-0435-54 | 5' Handy Roll Scaff. 4 Caster Unit w/ Steel Platforms, 27" W x 64" L x 63" H | 400 | 106 |

| HANDY ROLL SCAFFOLDING - 2 CASTER UNITS | | | |
|---|--|------|-----|
| Part No. | Description | Cap. | Wt. |
| 0063-0435-32 | 3' Handy Roll Scaff. 2 Caster Unit w/ Steel Platforms, 24" W x 48" L x 39" H | 400 | 72 |
| 0063-0435-42 | 4' Handy Roll Scaff. 2 Caster Unit w/ Steel Platforms, 24" W x 48" L x 51" H | 400 | 87 |
| 0063-0435-52 | 5' Handy Roll Scaff. 2 Caster Unit w/ Steel Platforms, 27" W x 64" L x 63" H | 400 | 106 |



125 Taylor Parkway • Archbold, OH 43502-9309
419-445-8915, 800-537-0540 • Fax 419-445-0367, www.biljax.com

Printed in the U.S.A.
© Bil-Jax, Inc. 2006
Part No. 0205-0002

Due to continuous product improvements, we reserve the right to make specification and/or equipment modifications without prior notification or obligation. All photographs and drawings in this brochure are for illustrative purposes only. Refer to applicable ANSI and OSHA Codes and Regulations for the proper use of this equipment and do not use in areas where user and/or equipment can come in contact with live power. Failure to follow the appropriate safety instructions and procedures, or to otherwise act irresponsibly, may result in serious injury or death.